

## CN890F drives 50 to 90mm flat wire welded nails

### FEATURES

- Ultra lightweight only 3.5kg
- Short height design only 344mm
- Easy-load magazine  
Pull up the door latch and swing the door open.



- Easy nail support



- Anti-double fire mechanism (UK Patent GB2286790)



- Dial adjustable depth control




- Contact tip included for finish work



- Comfortable rubber grip

- Maintenance free end cap filter (DEU Patent 19539950) (UK Patent 2294412)

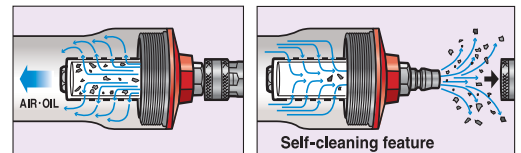


### APPLICATIONS

- Floor and wall framing
- Sub flooring
- Roof and wall sheathing
- Fencing

### TOOL SPECIFICATIONS

MODEL	CN890F
WEIGHT	3.5 kg
DIMENSIONS	344(H) × 128(W) × 298(L)mm
LOAD CAPACITY	120 Nails
OPERATING PRESSURE	5 to 7 bar ( 70 to 100 psi )
AIR CONSUMPTION	3.0 ℓ at 7 bar (0.11ft <sup>3</sup> at 100 psi) operating pressure
MODEL	CN890F
NOISE	A-weighted single-event sound power level LWA, 1s, d 98.8 dB A-weighted single-event emission sound pressure level at work station LpA, 1s, d 90.5 dB These values are determined and documented in accordance to EN12549:1999
VIBRATION	Vibration characteristic value = 4.38m/s <sup>2</sup> These values are determined and documented in accordance to ISO 8662-11

### FASTENERS APPLICABLE

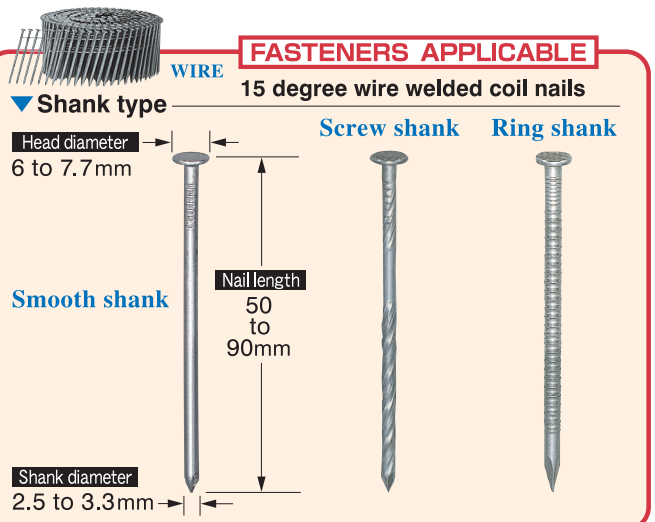

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.